

MFZ-KA-VA Inverter Heat Pump

R410A Floor Mounted System

New Series

The MFZ-KA-VA series is extremely versatile and is designed for wall attached installation at floor level. The auto swing vane provides a more natural and comfortable airflow throughout the room and the lightweight, compact design makes installation easy.



Technical Information >>

MFZ-KA-VA - INDOOR UNITS


MODEL REFERENCE		MFZ-KA25VA	MFZ-KA35VA	MFZ-KA50VA
CAPACITY (kW)	Heating (nominal)	3.4 (0.9-5.1)	4.0 (0.9-6.2)	6.0 (0.9-7.9)
	Cooling (nominal)	2.5 (0.9-3.4)	3.5 (0.9-3.9)	4.8 (0.9-5.4)
	Heating (UK)	2.85 (0.75-4.25)	3.3 (0.75-5.15)	5.0 (0.75-6.55)
	Cooling (UK)	2.5 (0.9-3.35)	3.45 (0.9-3.85)	4.75 (0.9-5.35)
SHF (nominal)		0.66	0.65	0.63
COP / EER (nominal)		4.07 / 4.31	3.64 / 3.21	3.23 / 3.10
ENERGY LABEL Heating/Cooling		A / A	A / A	C / B
AIRFLOW (m ³ /min)		Heating/Cooling - Lo-Mi-Hi-SupHi 5.0-6.2-7.6-9.1 / 4.8-5.8-7.1-8.7	5.2-6.2-7.8-9.5 / 5.0-6.1-7.4-9.1	7.4-8.8-9.8-11.8 / 7.1-7.9-9.2-10.7
PIPE SIZE mm(in)	Gas	9.52 (3/8")	9.52 (3/8")	12.7 (1/2")
	Liquid	6.35 (1/4")	6.35 (1/4")	6.35 (1/4")
NOISE (dBA) Heating/Cooling - Lo-Mi-Hi-SupHi		22-27-32-37 / 22-27-32-37	25-28-33-38 / 23-28-33-38	32-35-39-44 / 32-35-39-43
DIMENSIONS (mm)	Width	700	700	700
	Depth	200	200	200
	Height	600	600	600
WEIGHT (kg)		14	14	14
ELECTRICAL SUPPLY		Fed by Outdoor Unit	Fed by Outdoor Unit	Fed by Outdoor Unit
PHASE		Single	Single	Single
FUSE RATING (BS88) - HRC (A)		6	6	6
INTERCONNECTING CABLE No. CORES		4	4	4

SUZ-KA-VA - OUTDOOR UNITS


MODEL REFERENCE		SUZ-KA25VA	SUZ-KA35VA	SUZ-KA50VA
NOISE (dBA) Heating/Cooling		46 / 46	48 / 47	55 / 53
WEIGHT (kg)		33	37	53
DIMENSIONS (mm)	Width	800	800	840
	Depth	285	285	330
	Height	550	550	850
ELECTRICAL SUPPLY		220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz
SYSTEM POWER INPUT (kW)	Heating/Cooling (nominal)	0.835 / 0.58	1.10 / 1.09	1.86 / 1.55
	Heating/Cooling (UK)	0.76 / 0.46	1.00 / 0.87	1.69 / 1.24
STARTING CURRENT (A)		4.0	5.0	8.5
SYSTEM RUNNING CURRENT (A) Heating/Cooling		4.0 / 2.8	5.0 / 5.0	8.5 / 7.0
FUSE RATING (BS88) - HRC (A)		10	16	20
MAINS CABLE No. CORES		3	3	3
MAX PIPE LENGTH (m)		20	20	30
MAX HEIGHT DIFFERENCE (m)		12	12	15
CHARGE R410A (kg) - 7m		0.9	1.05	1.6

INDOOR UNIT MFZ-KA25-50VA


Upper View >

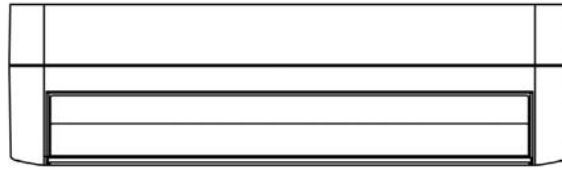

Front View >

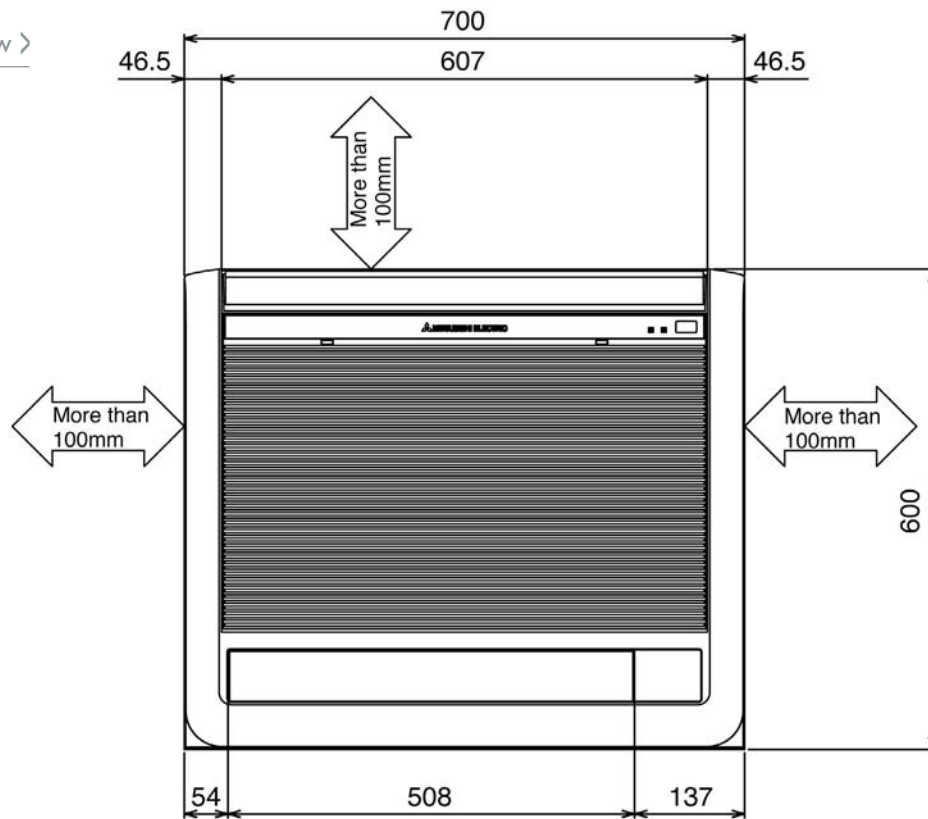

Side View >

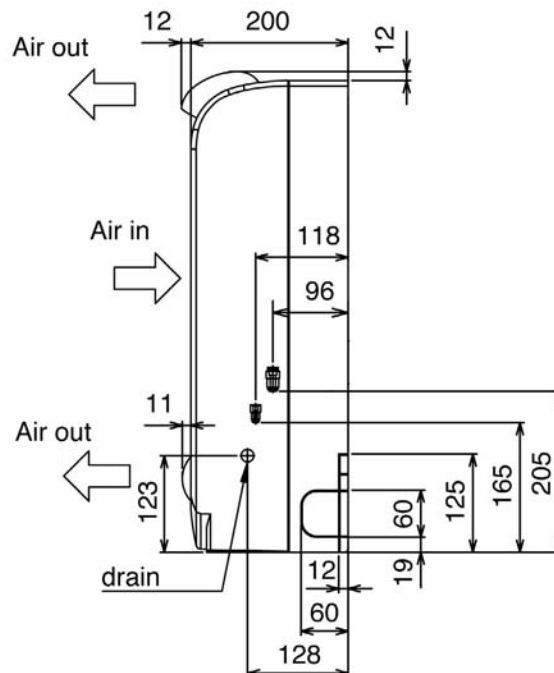

This pdf has been downloaded from the website of :

“Supplying and installing the latest in air conditioning technology”



Celsius Air Conditioning Ltd, 1 Well Street, Heywood, Greater Manchester OL10 1NT

 01706 367 500  07000 CELSIUS  01706 367 355  sales@celsiusair.co.uk  www.celsiusair.co.uk

www.celsiusair.co.uk