PCA-RP-HA Power Inverter Heat Pump

R410A Stainless Steel Ceiling Suspended System New Series

The PCA-RP-HA series is a ceiling suspended unit ideal for use in kitchen environments. The external casing is made of durable stainless steel that is resistant to oil and smoke, ensuring that the unit can be easily cleaned at all times.

- > High performance oil mist filter
- > Easy maintenance fan casing can be separated into different sections allowing easy cleaning. The drain pan can also be cleaned easily on-site as the pipe connector can be quickly removed.
- > Optional decoration covers
































Technical Information >>

PCA-RP-HA - INDOOR UNITS			
MODEL REFERENCE		PCA-RP71HA	PCA-RP125HA
CAPACITY (kW)	Heating (nominal)	8.0 (3.5-10.2)	14.0 (5.0-16.0)
	Cooling (nominal)	7.1 (3.3-8.1)	12.5 (5.5-14.0)
	Heating (UK)	6.8 (3.0-8.65)	11.9 (4.25-13.6)
	Cooling (UK)	6.4 (2.95-7.3)	11.25 (4.95-12.6)
SHF (nominal)		0.74	0.77
COP / EER (nominal)		3.21 / 3.21	3.29 / 3.21
ENERGY LABEL	Heating/Cooling	C/A	C/A
AIRFLOW (m3/min)	Lo-Hi	17-19	30-38
PIPE SIZE mm(in)	Gas	15.88 (5/8")	15.88 (5/8")
	Liquid	9.52 (3/8")	9.52 (3/8")
NOISE (dBA)	Lo-Hi	34-38	44-50
DIMENSIONS (mm)	Width	1136	1520
	Depth	650	650
	Height	280	280
WEIGHT (kg)		41	56
ELECTRICAL SUPPLY		Fed by Outdoor Unit	Fed by Outdoor Unit
PHASE		Single	Single
FUSE RATING (BS88) - HRC (A)		6	6
INTERCONNECTING CABLE No. CORES		4	4


PUHZ-RP - OUTDOOR UNITS			
MODEL REFERENCE		PUHZ-RP71VHA	PUHZ-RP125VHA/YHA
NOISE (dBA)	Heating/cooling	48 / 47	52 / 50
WEIGHT (kg)		75	121 / 135
DIMENSIONS (mm)	Width	950	950
	Depth	330 + 30	330 + 30
	Height	943	1350
ELECTRICAL SUPPLY		220-240v, 50Hz	220-240v, 50Hz / 380-415v, 50Hz
PHASE		Single	Single / 3
SYSTEM POWER INPUT (KW) Heating/Cooling (nominal)		2.49 / 2.21	4.25 / 3.89
Heating/Cooling (UK)		2.22 / 1.88	3.78 / 3.31
STARTING CURRENT (A)		5	5
SYSTEM RUNNING CURRENT (A) Single Phase		10.17 / 8.47	18.69 / 16.99
Heating/Cooling	3 Phase	-	6.60 / 6.04
FUSE RATING (BS88) – HRC (A)		25	32 / 16
MAINS CABLE No. Cores		3	3 / 5
MAX PIPE LENGTH (m)		50	75
MAX HEIGHT DIFFERENCE (m)		30	30
CHARGE R410A (kg) - 30m		3.5	5.0


INDOOR UNIT PCA-RP71HA

Front View >




Lower View >







INDOOR UNIT PCA-RPI25HA

Front View >



Lower View >

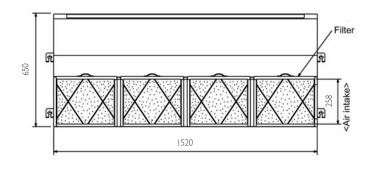



This pdf has been downloaded from the website of:

"Supplying and installing the latest in air conditioning technology"



Celsius Air Conditioning Ltd, I Well Street, Heywood, Greater Manchester OL10 INT

(a) 01706 367 500 (b) 07000 CELSIUS (c) 01706 367 355 (c) sales@celsiusair.co.uk (c) www.celsiusair.co.uk

www.celsiusair.co.uk