





## **CMB-P1013V-GA1**

Master BC Controller



- New brazed connections
- Transfers energy around the system, drawing on energy from the heat source units/outdoor units
- Directing energy as requested by the individual indoor units
- Instructs the heat source unit/outdoor unit on the amount of refrigerant (liquid or gas) that is required to achieve the requested cooling or heating requirements
- Allows unique 2-pipe heat recovery
- HIC Circuit for improved efficiency

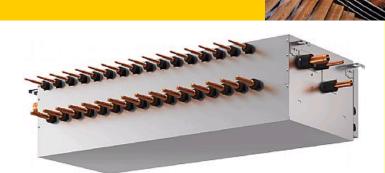

Pictures not to scale


## **Product Details**

CMB-P1013V-GA1	
Number of Connections	13
Power Input (kW) Heating (Nominal)	0.255
Power Input (kW) Cooling (Nominal)	0.255
Width - mm	1110
Depth - mm	520
Height - mm	289
Weight - kg	55
Electrical Supply	220-240v, 50Hz
Phase	Single
Mains Cable No. Cores	3
Running Current (A) - Heating	1.07
Running Current (A) - Cooling	107
Fuse Rating (BS88) - HRC (A)	6


## Dimension

CMB-P1013V-GA1

Upper View >







	Α	В
CMB-PI08V-GA1	7	420
CMB-PI010V-GA1	9	540
CMB-PI013V-GA1	12	720
CMB-PI016V-GA1/HA1	15	900



CELSIUS AIR CONDITIONING LTD 1, WELL STREET HEYWOOD OL10 1NT Tel: 01706 367500

Fax: 01706 367355

Telephone: 01707 282880

Email: air.conditioning@meuk.mee.com Website: http://www.mitsubishielectric.co.uk/aircon

Mitsubishi Electric reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement.



