




## **CMB-P1016V-GA1**

Master BC Controller



At the heart of both the R2 and WR2 Series, the BC Controller makes simultaneous heating and cooling possible. It has the inherent 'intelligence' to be the system's decision-maker. CMB-P-V-GA1 units are for use with PURY-(E)P200-650Y(S)JM-A outdoor units & PQRY-P200-600Y(S)HM-A condensing units only.

- New brazed connections
- Transfers energy around the system, drawing on energy from the heat source units/outdoor units
- Directing energy as requested by the individual indoor units
- Instructs the heat source unit/outdoor unit on the amount of refrigerant (liquid or gas) that is required to achieve the requested cooling or heating requirements
- Allows unique 2-pipe heat recoveryAllows unique 2-pipe heat recovery
- HIC Circuit for improved efficiency

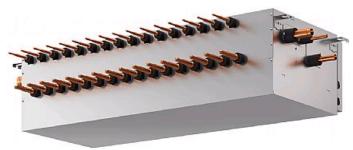

Pictures not to scale


## **Product Details**

CMB-P1016V-GA1	
Number of Connections	16
Power Input (kW) Heating (Nominal)	0.312
Power Input (kW) Cooling (Nominal)	0.312
Width - mm	1110
Depth - mm	520
Height - mm	289
Weight - kg	62
Electrical Supply	220-240v, 50Hz
Phase	Single
Mains Cable No. Cores	3
Running Current (A) - Heating	1.3
Running Current (A) - Cooling	1.3
Fuse Rating (BS88) - HRC (A)	6


## Dimension

CMB-P1016V-GA1

Upper View >







	A	В
CMB-PI08V-GA1	7	420
CMB-PI0I0V-GA1	9	540
CMB-PI013V-GA1	12	720
CMB-PI016V-GA1/HA1	15	900



CELSIUS AIR CONDITIONING LTD 1, WELL STREET HEYWOOD OL10 1NT Tel: 01706 367500

Tel: 01706 367500 Fax: 01706 367355 Telephone: 01707 282880

Email: air.conditioning@meuk.mee.com Website: http://www.mitsubishielectric.co.uk/aircon

Mitsubishi Electric reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement.



