



PLFY-P125VLMD-E

Indoor Unit

2-Way Blow Ceiling Cassette



The PLFY-P-VLMD-E cassette unit fits into the space in a suspended ceiling to provide heating or cooling. This new unit has been redesigned with lower unit height and lower noise levels.

- Light unit for ease of installation
- Terminal block on outside of unit for easy wiring
- Drain lift-pump mechanism as standard
- Newly designed decoration panel with airflow switching and swing functions as standard




Pictures not to scale

Product Details

PLFY-P125VLMD-E	
Capacity (kW):	
Heating (Nominal)	16.0
,	
Cooling (Nominal)	14.0
Heating (UK)	14.8
Cooling (UK)	13.2
R410A High Sensible Cooling (UK)	10.2
SHF R410A (UK)	0.73
SHF High Sensible R410A (UK)	0.8
Power Input (kW) Heating (Nominal)	0.27
Power Input (kW) Cooling (Nominal)	0.28
Airflow(m3/min) - Lo-Mi1-Mi2-Hi	24-27-30-33
Noise (dBA) - Lo-Mi1-Mi2-Hi	40-42-44-46
Width (grille) - mm	1708 (2010)
Depth (grille) - mm	606 (710)
Height (grille) - mm	290 (20)
Weight (grille) - kg	56 (13)
Electrical Supply	220-240v, 50Hz
Phase	Single
Mains Cable No. Cores	3
Running Current (A) - Heating	1.33
Running Current (A) - Cooling	1.35
Fuse Rating (BS88) - HRC (A)	6
Grille Ref	CMP-125VLW-B GRILLE CITY MULTI

Dimension

PLFY-P125VLMD-E

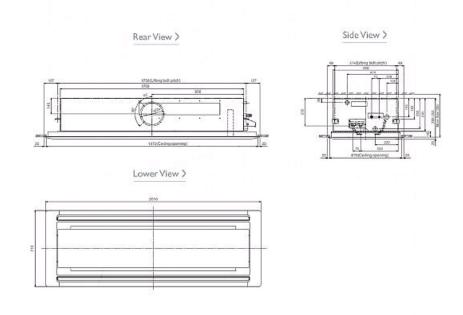



CELSIUS AIR CONDITIONING LTD 1, WELL STREET HEYWOOD OL10 1NT Tel: 01706 367500

Tel: 01706 367500 Fax: 01706 367355

Telephone: 01707 282880

Email: air.conditioning@meuk.mee.com Website: http://www.mitsubishielectric.co.uk/aircon

Mitsubishi Electric reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement.



