



PLFY-P40VLMD-E

Indoor Unit

2-Way Blow Ceiling Cassette

The PLYF-P-VLMD-E cassette unit fits into the space in a suspended ceiling to provide heating or cooling. This new unit has been redesigned with lower unit height and lower noise levels.

- **Light unit for ease of installation**
- **Terminal block on outside of unit for easy wiring**
- **Drain lift-pump mechanism as standard**
- **Newly designed decoration panel with airflow switching and swing functions as standard**



Pictures not to scale




Product Details

PLFY-P40VLMD-E	
Capacity (kW):	
Heating (Nominal)	5.0
Cooling (Nominal)	4.5
Heating (UK)	4.6
Cooling (UK)	4.3
R410A High Sensible Cooling (UK)	3.3
SHF R410A (UK)	0.67
SHF High Sensible R410A (UK)	0.73
Power Input (kW) Heating (Nominal)	0.074
Power Input (kW) Cooling (Nominal)	0.081
Airflow(m ³ /min) - Lo-Mi-Hi	7-8.5-10.5
Noise (dBA) - Lo-Mi-Hi	29-33-36
Width (grille) - mm	776 (1080)
Depth (grille) - mm	634 (710)
Height (grille) - mm	290 (20)
Weight (grille) - kg	24 (6.5)
Electrical Supply	220-240v, 50Hz
Phase	Single
Mains Cable No. Cores	3
Running Current (A) - Heating	0.34
Running Current (A) - Cooling	0.4
Fuse Rating (BS88) - HRC (A)	6
Grille Ref	CMP-40VLW-B


Dimensions

PLFY-P40VLMD-E


Front View >

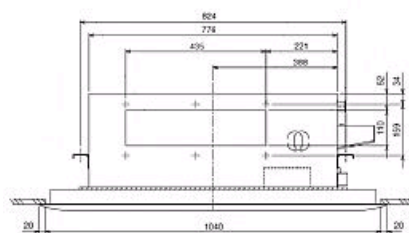

Side View >



Lower View >

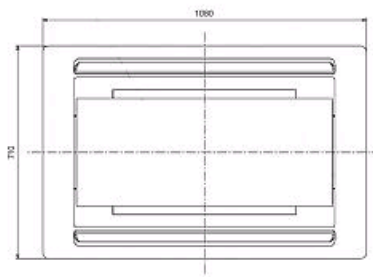

Telephone: 01707 282880

Email: air.conditioning@meuk.mee.com Website: <http://www.mitsubishielectric.co.uk/aircon>

CELSIUS AIR CONDITIONING LTD
1, WELL STREET
HEYWOOD
OL10 1NT
Tel: 01706 367500
Fax: 01706 367355

Mitsubishi Electric reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement.

