




## PLFY-P80VBM-E

Indoor Unit

2, 3 & 4 Way Blow Ceiling Cassette



- Handy corner pocket design simplifies maintenance
- Airflow controllable for ceiling heights up to 4.2m, with automatic adjustment of fan speed
- Reduced draft air distribution, with independent vane control
- Drain pump as standard, 850mm from drain pan
- Filter lowering operation down to 4m (optional PLP-6BAJ grille required)
- Optional 'I See Sensor' for energy saving and smooth temperature control throughout the room




Pictures not to scale

## **Product Details**

PLFY-P80VBM-E	
Capacity (kW):	
Heating (Nominal)	10.0
Cooling (Nominal)	9.0
Heating (UK)	9.2
Cooling (UK)	8.0
R410A High Sensible Cooling (UK)	6.5
SHF R410A (UK)	0.73
SHF High Sensible R410A (UK)	0.78
Power Input (kW) Heating (Nominal)	0.06
Power Input (kW) Cooling (Nominal)	0.07
Airflow(m3/min) - Lo-Mi1-Mi2-Hi	16-18-20-22
Noise (dBA) - Lo-Mi1-Mi2-Hi	30-32-35-37
Width (grille) - mm	840 (950)
Depth (grille) - mm	840 (950)
Height (grille) - mm	258 (35)
Weight (grille) - kg	23 (6)
Electrical Supply	220-240v, 50Hz
Phase	Single
Mains Cable No. Cores	3
Running Current (A) - Heating	0.43
Running Current (A) - Cooling	0.51
Fuse Rating (BS88) - HRC (A)	6
Grille Ref	PLP-6BA GRILLE

## Dimension

## PLFY-P80VBM-E

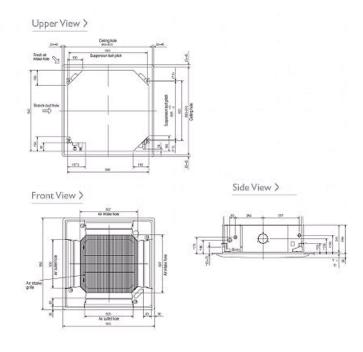



CELSIUS AIR CONDITIONING LTD 1, WELL STREET HEYWOOD OL10 1NT Tel: 01706 367500

Tel: 01706 367500 Fax: 01706 367355 Telephone: 01707 282880

Email: air.conditioning@meuk.mee.com Website: http://www.mitsubishielectric.co.uk/aircon

Mitsubishi Electric reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement.



