




# PEFY-P20VMA-E

Indoor Unit

Ceiling Concealed Ducted



- Reduced height now only 250mm
- Drain lift-pump included as standard
- Wider range of external static pressure settings
- Cooling operation set temperature can be set down to 14°C db when used with R410A




Pictures not to scale

### Product Details

PEFY-P20VMA-E	
Capacity (kW):	
Heating (Nominal)	2.5
Cooling (Nominal)	2.2
Heating (UK)	2.3
Cooling (UK)	2.1
R410A High Sensible Cooling (UK)	1.6
SHF R410A (UK)	0.9
SHF High Sensible R410A (UK)	1.0
Power Input (kW) Heating (Nominal)	0.04
Power Input (kW) Cooling (Nominal)	0.06
Airflow(m3/min) - Lo-Mi-Hi	6-7.5-8.5
External Static Pressure Pa - Lo-Mi-Hi	35-70-150
Noise (dBA) - Lo-Mi-Hi	23-25-26
Width - mm	700
Depth - mm	732
Height - mm	250
Weight - kg	23
Electrical Supply	220-240v, 50Hz
Phase	Single
Mains Cable No. Cores	3
Running Current (A) - Heating	0.42
Running Current (A) - Cooling	0.53
Fuse Rating (BS88) - HRC (A)	6

#### Dimension

## PEFY-P20VMA-E

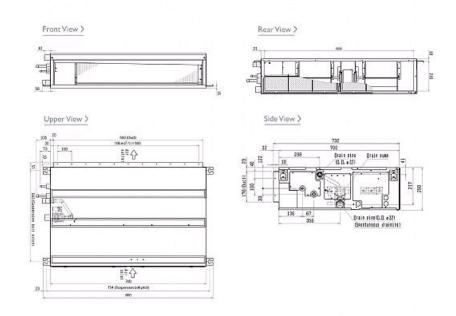



CELSIUS AIR CONDITIONING LTD 1, WELL STREET HEYWOOD OL10 1NT Tel: 01706 367500

Tel: 01706 367500 Fax: 01706 367355

# Telephone: 01707 282880

Email: air.conditioning@meuk.mee.com Website: http://www.mitsubishielectric.co.uk/aircon

Mitsubishi Electric reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement.



