



PEFY-P20VMS1-E

Indoor Unit

Ultra Thin Ceiling Concealed Ducted

The ultra thin ceiling concealed ducted indoor unit offers increased flexibility and is particularly suitable for places where low noise operation is desired from a slimline body.


- Ultra thin body height of only 200mm
- Extremely quiet operation as low as 22dBA
- Cooling operation set temperature can be set down to 14°C db when used with R410A
- Static Pressures of 5-50Pa




Pictures not to scale

PEFY-P20VMS1-E	
Capacity (kW):	
Heating (Nominal)	2.5
Cooling (Nominal)	2.2
Heating (UK)	2.3
Cooling (UK)	2.0
R410A High Sensible Cooling (UK)	1.6
SHF R410A (UK)	0.85
SHF High Sensible R410A (UK)	1.0
Power Input (kW) Heating (Nominal)	0.03
Power Input (kW) Cooling (Nominal)	0.05
Airflow(m3/min) - Lo-Mi1-Mi2	5.5-6.5-8
External Static Pressure Pa - Lo-Mi-Hi	5-15-50
Noise (dBA) - Lo-Mi1-Mi2	22-25-29
Width - mm	700
Depth - mm	790
Height - mm	200
Weight - kg	19
Electrical Supply	220-240v, 50Hz
Phase	Single
Mains Cable No. Cores	3
Running Current (A) - Heating	0.36
Running Current (A) - Cooling	0.47
Fuse Rating (BS88) - HRC (A)	6

PEFY-P20VMS1-E

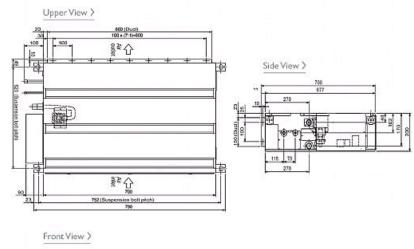





Telephone: 01707 282880

Email: air.conditioning@meuk.mee.com Website: http://www.mitsubishielectric.co.uk/aircon

Mitsubishi Electric reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement.





CELSIUS AIR CONDITIONING LTD 1, WELL STREET HEYWOOD **OL10 1NT** Tel: 01706 367500 Fax: 01706 367355