



## **PFFY-P40VKM-E**

Indoor Unit

Floor Standing Exposed

The PFFY-P-VKM-E series is extremely versatile and is designed for wall attached installation at floor level. The auto swing vane provides a more natural and comfortable airflow throughout the room and the lightweight, compact design makes installation easy.

- Pure white, slimline design
- Upper and lower vanes for optimum, powerful and efficient air distribution

|  |  | Contraction of Address |  | - 100 |
|--|--|------------------------|--|-------|
|  |  |                        |  | -     |
|  |  |                        |  |       |
|  |  |                        |  |       |
|  |  |                        |  |       |
|  |  |                        |  |       |
|  |  |                        |  |       |
|  |  |                        |  |       |
|  |  |                        |  |       |
|  |  |                        |  |       |
|  |  |                        |  |       |
|  |  |                        |  |       |
|  |  |                        |  |       |
|  |  |                        |  |       |
|  |  |                        |  |       |
|  |  |                        |  |       |
|  |  |                        |  |       |
|  |  |                        |  |       |
|  |  |                        |  |       |
|  |  |                        |  |       |
|  |  |                        |  |       |
|  |  |                        |  |       |
|  |  |                        |  |       |
|  |  |                        |  |       |

Pictures not to scale




## **Product Details**

| PFFY-P40VKM-E                      |                |
|------------------------------------|----------------|
| Capacity (kW):                     |                |
| Heating (Nominal)                  | 5.0            |
| Cooling (Nominal)                  | 4.5            |
| Heating (UK)                       | 4.6            |
| Cooling (UK)                       | 4.3            |
| R410A High Sensible Cooling (UK)   | 3.3            |
| SHF R410A (UK)                     | 0.7            |
| SHF High Sensible R410A (UK)       | 0.76           |
| Power Input (kW) Heating (Nominal) | 0.028          |
| Power Input (kW) Cooling (Nominal) | 0.028          |
| Airflow(m3/min) - Lo-Mi1-Mi2-Hi    | 8-9-9.5-10.7   |
| Noise (dBA) - Lo-Mi1-Mi2-Hi        | 35-38-42-44    |
| Width - mm                         | 700            |
| Depth - mm                         | 200            |
| Height - mm                        | 600            |
| Weight - kg                        | 15             |
| Electrical Supply                  | 220-240v, 50Hz |
| Phase                              | Single         |
| Mains Cable No. Cores              | 3              |
| Running Current (A) - Heating      | 0.24           |
| Running Current (A) - Cooling      | 0.24           |
| Fuse Rating (BS88) - HRC (A)       | 6              |

## Dimensions

PFFY-P40VKM-E

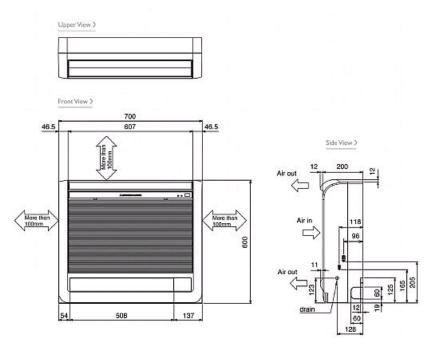



Telephone: 01707 282880

Email: air.conditioning@meuk.mee.com Website: http://www.mitsubishielectric.co.uk/aircon

CELSIUS AIR CONDITIONING LTD 1, WELL STREET HEYWOOD OL10 1NT Tel: 01706 367500 Fax: 01706 367355 Mitsubishi Electric reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement.

