



LGH-35RX5-E

Lossnay

Commercial Series

This commercially orientated system can be utilised virtually anywhere to extract stale air and then recover the heating or cooling energy to either warm or cool incoming fresh air.

- Effective fresh air ventilation
- High heat recovery
- Free cooling function
- Good sound attenuation
- New "Hyper Eco Core". At only 25um the Lossnay core uses the thinnest paper in the world to achieve high enthalpy exchange efficiency






Pictures not to scale

Product Details

LGH-35RX5-E	
Airflow (m3/h) - Lossnay Ventilation - Lo-Hi- ExHi	115-350-350
Noise (dBA) - Lossnay Ventilation - Lo-Hi-ExHi	18-29.5-32
Noise (dBA) - Bypass Ventilation - Lo-Hi-ExHi	18-30.5-32.5
Width - mm	874
Depth - mm	888
Height - mm	315
Weight - kg	29
Electrical Supply	220-240v,50Hz
Fuse Rating (BS88) - HRC (A)	6
Duct Size (mm)	150
Power Input (W) - Low	116
Power Input (W) - High	169
Power Input (W) - Extra high	212
Starting Current (A)	2.4
Running Current - Low	0.51
Running Current - High	0.74
Running Current - Extra High	0.92
Mains Cable No. Cores	3
Temperature Exchange Efficiency (%) - Low	85
Temperature Exchange Efficiency (%) - High	80
Temperature Exchange Efficiency (%) - Extra High	80

Dimensions

LGH-35RX5-E

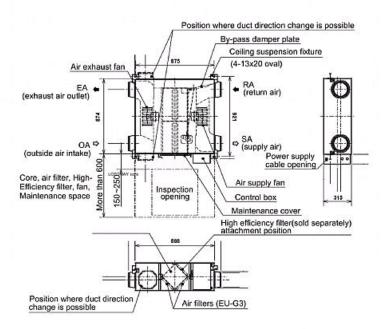



CELSIUS AIR CONDITIONING LTD 1, WELL STREET HEYWOOD OL10 1NT Tel: 01706 367500

Tel: 01706 367500 Fax: 01706 367355 Telephone: 01707 282880

Email: air.conditioning@meuk.mee.com Website: http://www.mitsubishielectric.co.uk/aircon

Mitsubishi Electric reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement.



