


LGH-80RX5-E

Lossnay

Commercial Series



- Effective fresh air ventilation
- High heat recovery
- Free cooling function
- Good sound attenuation
- New "Hyper Eco Core". At only 25um the Lossnay core uses the thinnest paper in the world to achieve high enthalpy exchange efficiency



Pictures not to scale

0

14




conditioning

Product Details

LGH-80RX5-E	
Airflow (m3/h) - Lossnay Ventilation - Lo-Hi- ExHi	355-800-800
Noise (dBA) - Lossnay Ventilation - Lo-Hi-ExHi	22-33-34.5
Noise (dBA) - Bypass Ventilation - Lo-Hi-ExHi	22-34-35.5
Width - mm	1004
Depth - mm	1144
Height - mm	399
Weight - kg	53
Electrical Supply	220-240v,50Hz
Fuse Rating (BS88) - HRC (A)	6
Duct Size (mm)	250
Power Input (W) - Low	340
Power Input (W) - High	370
Power Input (W) - Extra high	415
Starting Current (A)	3.8
Running Current - Low	1.45
Running Current - High	1.60
Running Current - Extra High	1.75
Mains Cable No. Cores	3
Temperature Exchange Efficiency (%) - Low	80.5
Temperature Exchange Efficiency (%) - High	79
Temperature Exchange Efficiency (%) - Extra High	79

Dimensions

LGH-80RX5-E

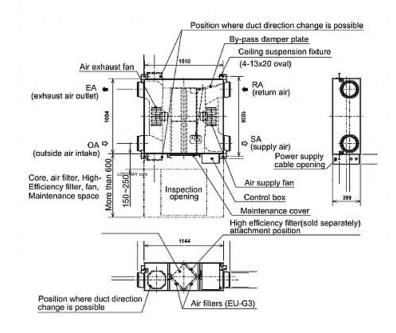



CELSIUS AIR CONDITIONING LTD 1, WELL STREET HEYWOOD OL10 1NT Tel: 01706 367500 Fax: 01706 367355

Telephone: 01707 282880

Email: air.conditioning@meuk.mee.com Website: http://www.mitsubishielectric.co.uk/aircon

Mitsubishi Electric reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement.

