




VL 100U

Total Heat Exchanger

Residential Series



- Effective fresh air ventilation
- Efficient recovery of heating/cooling energy
- Good sound attenuation
- Reduces heating costs




Pictures not to scale

Product Details

VL 100U	
Airflow (m3/h) - Lo-Hi	65-105
Noise (dBA) - Lo-Hi	29.5-39
Width - mm	620
Depth - mm	168
Height - mm	265
Weight - kg	6.5
Electrical Supply	220-240v, 50Hz
Phase	Single
Fuse Rating (BS88) - HRC (A)	6
Duct Size (mm)	2 x 75
Power Input (W) - Low	23
Power Input (W) - High	26
Mains Cable No. Cores	3
Temperature Exchange Efficiency (%) - Low	77
Temperature Exchange Efficiency (%) - High	70

Dimensions

VL-100U

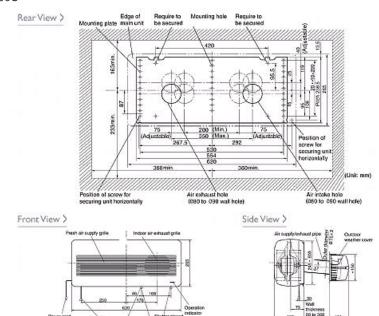



CELSIUS AIR CONDITIONING LTD 1, WELL STREET HEYWOOD OL10 1NT Tel: 01706 367500

Tel: 01706 367500 Fax: 01706 367355 Telephone: 01707 282880

Email: air.conditioning@meuk.mee.com Website: http://www.mitsubishielectric.co.uk/aircon

Mitsubishi Electric reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement.



