



PLA-RP60BA

Power Inverter Heat Pump

R410A 4-Way Blow Ceiling Cassette System

Advanced inverter technology makes the Mr Slim Power Inverter the number one choice for improving comfort. They provide energy savings of up to 70% annually when compared to a previous non-inverter model. Operating noise has also been reduced thanks to improvements in fan design, while existing pipe work is reusable for easier maintenance and installation.

- **Airflow controllable for ceiling heights up to 4.2m, with automatic adjustment of fan speed**
- **Reduced draft air distribution, with independent vane control**
- **Filter lowering operation down to 4m (optional PLP-6BAJ grille required)**
- **Optional 'I See Sensor' for energy saving and smooth temperature control throughout the room**



Pictures not to scale

Product Details	
Product Name	Advanced Analytics Dashboard
Version	2.1.0
Release Date	2023-10-27
Category	Business Intelligence
License	Commercial License
Support	24/7 Email and Chat Support
Documentation	Comprehensive User Guide and API Docs
Integration	Seamless integration with major CRM and ERP systems
Customization	Highly customizable themes and reports
Security	Enterprise-grade security with regular updates
Performance	Optimized for high-speed data processing
Scalability	Scalable architecture for growing businesses
Compliance	GDPR and SOC 2 compliant
Training	Free onboarding and training sessions
Feedback	Active user feedback loop for continuous improvement

PLA-RP60BA Indoor Unit




Capacity (kW):	
Heating (Nominal) (Low - High)	7.00 (2.80 - 8.20)
Cooling (Nominal) (Low - High)	6.00 (2.70 - 6.70)
Heating (UK) (Low - High)	5.95 (2.40 - 6.95)
Cooling (UK) (Low - High)	5.50 (2.50 - 6.15)
SHF R410A (Nominal)	0.76
COP / EER (Nominal)	3.85 / 3.75
Energy Label Heating / Cooling	A / A
Width (grille) - mm	840 (950)
Depth (grille) - mm	840 (950)
Height (grille) - mm	258 (35)
Weight (grille) - kg	23 (6)
Airflow (m3/min) - Lo-Mi1-Mi2-Hi	12-14-16-18
Noise (dBA) - Lo-Mi1-Mi2-Hi	28-29-31-32
Pipe Size Gas mm (in)	15.88 (5/8)
Pipe Size Liquid mm (in)	9.52 (3/8)
Electrical Supply	Fed by Outdoor Unit
Phase	Single
Fuse Rating (BS88) - HRC (A)	6
Interconnecting Cable No. Cores	4
Grille Ref	PLP-6BA GRILLE

PUHZ-RP60VHA4 Outdoor Unit





Width - mm	950
Depth - mm	330 + 30
Height - mm	943
Weight - kg	67
Noise (dBA) (Heating /Cooling) - Lo-Hi	48 /44-47
Electrical Supply	220-240v, 50Hz
Phase	Single
Fuse Rating (BS88) - HRC (A)	20
SystemPower Input (kW) - Heating (Nominal)	1.82
SystemPower Input (kW) - Cooling (Nominal)	1.6
SystemPower Input (kW) - Heating (UK)	1.62
SystemPower Input (kW) - Cooling (UK)	1.36
Starting Current (A)	5
SystemRunning Current (A) - Heating / Cooling	8.34 / 7.31
Mains Cable No. Cores	3
Max Pipe Length (m)	50
Max Height Difference (m)	30
Charge (kg) - 30m	3.5

Dimensions

PLA-RP60BA



PUHZ-RP60VHA4

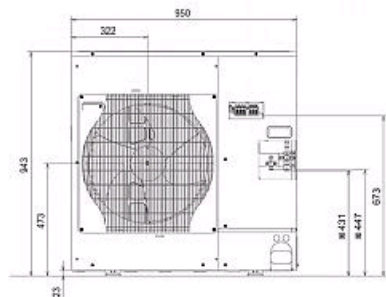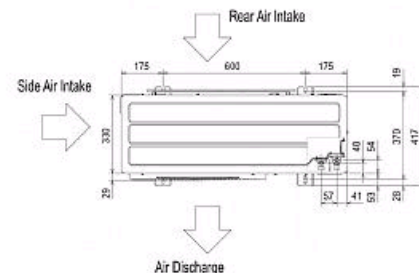

Telephone: 01707 282880

Email: air.conditioning@meuk.mee.com Website: <http://www.mitsubishielectric.co.uk/aircon>

CELSIUS AIR CONDITIONING LTD

1, WELL STREET

HEYWOOD

OL10 1NT

Tel: 01706 367500

Fax: 01706 367355

Mitsubishi Electric reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement.

