



## PUHY-RP800YSJM-A

Replace Multi Y Series 32hp Outdoor Unit

R410A Heat Pump

The latest VRF Replace Multi from Mitsubishi Electric is specifically designed for the maturing refurbishment sector, enabling the reuse of existing R22/R407c pipework, whilst also allowing the upgrade to some of the most efficient systems available in the market.

- Tried and tested technology that's been employed for over 5 years
- Efficient use of existing resources refrigerant piping, control and power wiring and less waste materials
- Reduced installation time with minimised disruption
- Ability to replace many non Mitsubishi Electric systems



Pictures not to scale



## **Product Details**


PUHY-RP800YSJM-A	
Capacity (kW):	
Heating (Nominal)	100.0
Cooling (Nominal)	90.0
Heating (UK)	87.0
Cooling (UK)	82.8
Power Input (kW) Heating (Nominal)	25.44
Power Input (kW) Cooling (Nominal)	27.19
Power Input (kW) Heating (UK)	23.66
Power Input (kW) Cooling (UK)	22.84
Max No. of Connectable Indoor Units	32
Airflow(m3/min)	185
Noise (dBA)	62.5
Width - mm	920 + 920 + 920
Depth - mm	760
Height - mm	1710
Weight - kg	255 + 255 + 255
Electrical Supply	380-415v, 50Hz
Mains Cable No. Cores	4 core + earth
Starting Current (A)	8
Running Current (A) - Heating	39.3
Running Current (A) - Cooling	42


Piping Restrictions	
Total Piping Length (m)	250
Furthest Piping Length (m)	100
Furthest Piping Length after 1st Branch (m)	40
Between Indoor and Outdoor Units - Height (m)	50
Between Indoor and Indoor Units - Height (m)	15

## Dimensions

PUHY-RP800YSJM-A

Upper View >



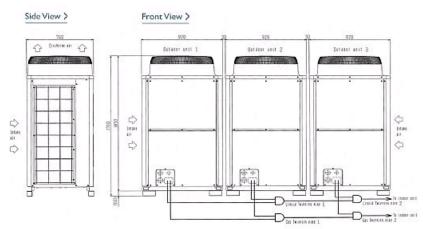



CELSIUS AIR CONDITIONING LTD 1, WELL STREET HEYWOOD OL10 1NT Tel: 01706 367500 Fax: 01706 367355

## Telephone: 01707 282880

Email: air.conditioning@meuk.mee.com Website: http://www.mitsubishielectric.co.uk/aircon

Mitsubishi Electric reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement.

